



EoL

END OF LINE

## 2011SS CONTINUOUS MOTION HORIZONTAL SIDE SEAL WRAPPER



### Easy to use and rugged enough for constant operation

A perennial favorite of contract packagers, wrappers like the 2011SS and its predecessor the 2203 with its 10" high, 20" wide product capacity, and 100 feet per minute conveyor speeds is versatile enough to accommodate a variety of product sizes and configurations

Flexibility and ease-of-use are hallmarks of Texwrap design. With standard auto spacing control, and the ability to precisely vary the conveyor speeds to relax the film between products, the 2011SS can accommodate randomly fed or choke-spaced products and accurately separate them for reliable, consistent packages using the absolute minimum amount of film.

#### FEATURES AND BENEFITS

- 11" cross seal height opening
- Servo vertical end seal
- Texwrap's exclusive Versa Seal side seal
- Safety interlocked sliding doors- lift out for easy maintenance access
- Low film unwind with optional centerfolder
- Motion Trim™ for increased speeds
- Adjustable film inverting head with controlled air bearing surfaces for reduced film drag
- Horizontal and vertical photo eye controlled cross seal system to provide automatic adjustment of bag length
- Automatic speed maximizer (automatically brings machine up to top speed for a given set up)
- Enhanced sealing performance for tall packages
- Internal scrap windup system

## TYPICAL PRODUCT SPECIFICATIONS


<b>Max. Package Size</b>	Infinite length x 20"W x 10"H
<b>Min. Package Size</b>	4"L x 2"W
<b>Film Width</b>	64" flat or 32" centerfolded
<b>Electrical Requirements</b>	240/208 V, 1 phase, 20/23 amps

<b>Machine Controls</b>	Allen Bradley
<b>Conveyor Height</b>	Adjustable from 32.5" to 37.5"
<b>Max. Film Speed</b>	Up to 100' per minute
<b>Air Requirements</b>	80 PSI


\* Specifications on all machines subject to change without notice. Some information may have been updated since the time of publication.

## CONFIGURATION

Top View

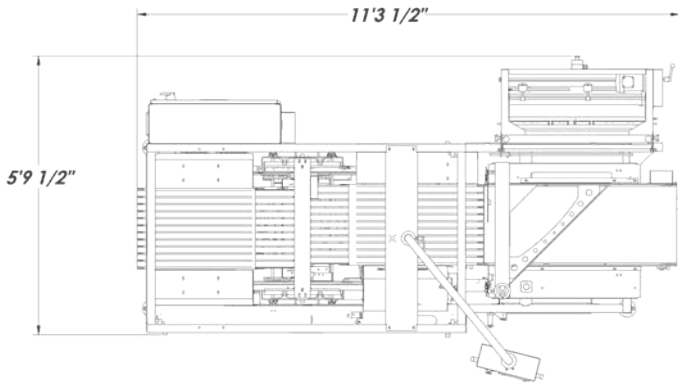

Front View

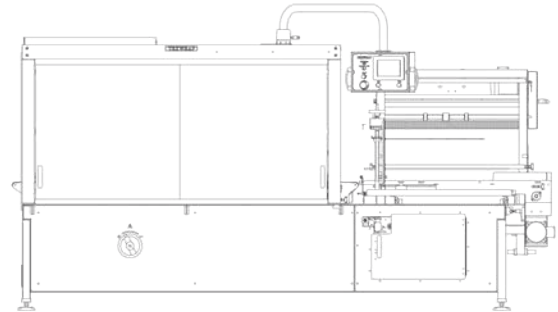

## MORE ABOUT THE 2011SS

The operator controls are located on a swivel-mount panel allowing it to easily be accessed from either side of the machine. The instructions are easy to understand and film threading is fast and easy. With Allen-Bradley controls, AC inverter-duty motors, restricted service-level menus, and auto-tune heaters, the ST-2011 is as popular with maintenance staffs as it is with the operators..